




## ITX-H610M1 VER:1.0 规格表

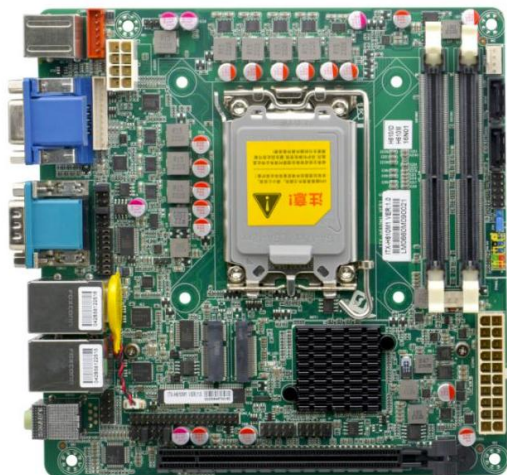

ITX-H610M1 VER:1.0 主板正面图

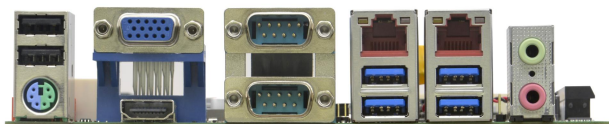

ITX-H610M1 VER:1.0 主板 IO 图

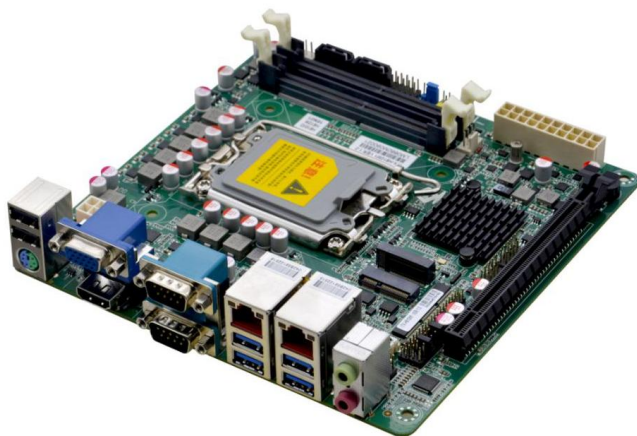

ITX-H610M1 VER:1.0 主板侧面图

Product model	ITX-H610M1 VER:1.0
processor	Supports LGA1700 12th/13th Intel® Celeron/Pentium/Core™ i3/i5/i7/i9 processors, Note: cpus below 125W are supported
chipset	With Intel® H610 chipset,
Internal memory	2* DDR4 SODIMM memory slots, supporting a dual-channel memory of up to 3200MHz and up to 64GB
display	Integrated Intel®HD Graphics core graphics card supports DirectX12.1,OpenGL4.5, and supports 4K display
	1 x VGA port, the maximum resolution is 1920X1200@60Hz
	1* HDMI1.4 interface, support the highest resolution of 4096x2304@24Hz
network	2* Intel®I226V Gigabit network adapter chip, support network wake up /PXE function
deposit	2* SATA3.0 hard disk interface, transmission speed up to 6Gbps
	1* M.2 slot, supporting the M.2 Key M 2260/2280 NVME PCIE3.0X4 /SATA adaptive SSD
Tone frequency	Onboard ALC897 7.1+2 channel hi-fi audio controller with MIC/Line-out support
Expansion slot	1* PCIE3.0 X16 slot
	1* M.2, supporting the M.2 2230 WIFI module
I/O ports on the backplane	1* PS/2 interface (expandable keyboard and mouse)
	1 x DB15 VGA port
	1* HDMI1.4 port
	2* DB9 RS232 serial port, support 9pin live function, support RS485/422
	2* USB2.0 port
	4* USB3.0 port
	2* RJ-45 Gigabit network interface
1* Dual-layer audio interface (sound output and MIC input)	
Built-in I/O interface	3 x USB2.0 port 2 x 5pin. F_USB2 supports only one USB2.0
	1* Front panel audio interface (2*5pin)

	1* Front panel function buttons and indicator ports (2*5pin)
	1* 24pin ATX Power socket 1* 8pin ATX power socket
	1* PS/2 keyboard and mouse interface 1*6pin
	1* JVGA port 1*12pin, same signal as DB15
	4* RS232 serial port, 2*20pin
Fan interface	1*4pin CPU fan interface; 1*4pin system fan port
BIOS	64Mb Flash ROM
Guard dog	Support hardware reset function (256 level, 0~255 seconds)
Operating system	Windows 10/Windows 11/Linux
Power supply type	Powered by ATX 20Pin and 8pin power supplies
Operating temperature	0°C to 60°C
Storage temperature	-20°C to 70°C
Working humidity	5%-95% relative humidity, no condensation
Size	170mm * 170mm

## 订购信息:

No.	Model	Processor	Frequency	Southbridge	Memory	VGA	HD OUTPUT	DP	LAN	USB	COM	RS485/422	Power
1	ITX-H610M1 VER:1.0	LGA1700	/	H610	2*DDR4	1	1	/	2*I226V	9	6	COM1/2	ATX

