



## D41SL VER1.0 规格表



D41SL VER1.0 主板正面



D41SL VER:1.0 主板 IO 图

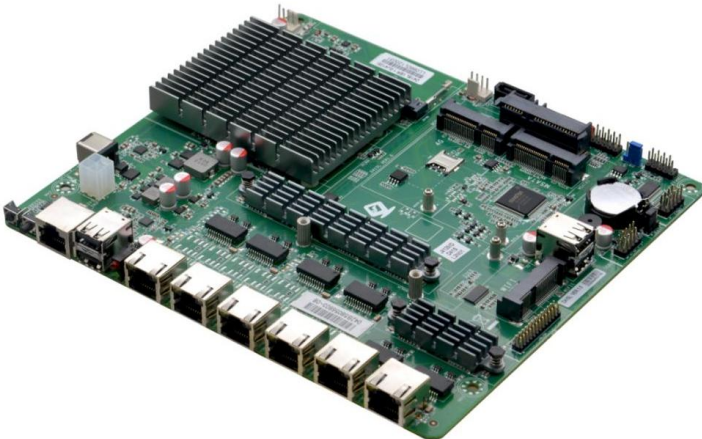

D41SL VER:1.0 主板侧面图

|                            |   |
|----------------------------|---|
| Product model              | D41SL VER:1.0   |
| processor                  | Integrated Intel®Celeron J4125 2.0GHz quad-core quad-thread processor,TDP 10W   |
| chipset                    | SOC   |
| Internal memory            | 1* SODIMM slot for a single channel of 2400MHz DDR4 memory (up to 8GB)  |
| display                    | Integrated Intel® HD Graphics core graphics card, providing 1*VGA display output  |
| network                    | 6* Intel KTI226V Gigabit network adapter, support network wake up, PXE functions,   |
| deposit                    | 1*SATA3.0 2.5-inch laptop hard disk, you can directly install the hard disk   |
|                            | 1* 7pin SATA3.0 hard disk interface, transmission rate up to 6Gbps, and 2.5-inch hard disk is one of two options, the default is 2.5 inches |
|                            | 1* MSATA slot, support Intel protocol SSD solid state drive, transfer rate up to 6Gbps  |
| Expansion slot             | 1* Mini-PCIE2 slot, supporting the WIF module.  |
|                            | 1* Mini-PCIE1 slot, supporting 4G modules   |
|                            | Note:WIFI and LAN6 are two options, the default is LAN6   |
| I/O ports on the backplane | 1* standard RS232 serial interface  |
|                            | 2* USB 2.0 port   |
|                            | 6* RJ-45 Gigabit network port   |
|                            | 1* Power switch, 1* reset switch  |
|                            | 1* Power indicator (green)/Hard disk indicator (red)  |
| Built-in I/O interface     | 1* JVGA port 1 x 12pin  |
|                            | 1* Network indicator port 2*13pin   |
|                            | 1* RS232 serial port 2*5pin   |

|                       |   |
|-----------------------|---|
|                       | 2* USB2.0 interface 2*5pin  |
|                       | 2* Standard USB2.0 interface  |
|                       | 1* hard drive power port 1*4pin                                     |
|                       | 1* Front panel function button and indicator port 2*5pin            |
|                       | 1* PS/2 keyboard and mouse interface 1*6pin                         |
|                       | 1* DC12V power input port   |
|                       | 1* 4pinATX power input port supports 12V power input and output     |
| Fan interface         | 1* 4pin CPU intelligent fan interface, 1* 4pin system fan interface |
| GPIO                  | Supports four input/output GPIO                                     |
| BIOS                  | 64Mb Flash ROM  |
| Guard dog             | Support hardware reset function (256 level, 0~255 seconds)          |
| Power supply type     | Adopts DC 12V power supply  |
| Operating system      | Window 10/Linux   |
| Operating temperature | -10℃~60℃  |
| Storage temperature   | -20℃~70℃  |
| Working humidity      | 5%-95% relative humidity, no condensation                           |
| dimension             | 200mm * 180mm   |

## 订购信息:

| No. | Model         | Processor | Frequency | Memory    | VGA | LVDS | LAN    | USB | COM | BYPASS | Power |
|-----|---------------|-----------|-----------|-----------|-----|------|--------|-----|-----|--------|-------|
| 1   | D41SL VER:1.0 | J4125     | 2.0GHz    | 1*SODDDR4 | 1   | X    | 6*226V | 6   | 1   | X      | DC12V |

