


N510S6 VER:1.0 规格表



N510S6 VER:1.0 主板正面图



N510S6 VER:1.0 主板 IO 图

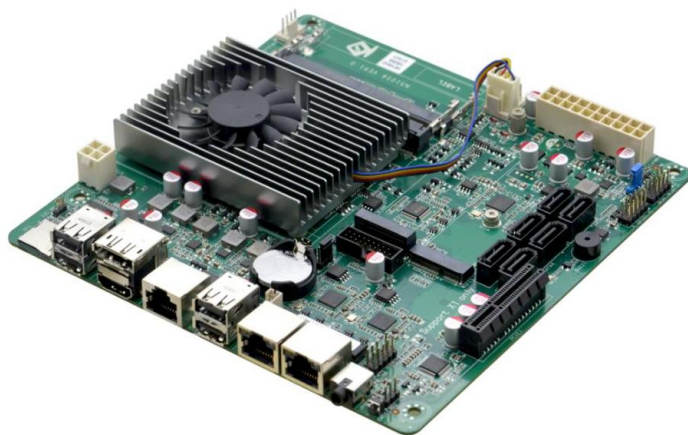

N510S6 VER:1.0 主板侧面图

Product model	N510S6 VER:1.0
processor	Integrated Intel®Celeron N5105 2.0GHz quad-core quad-thread processor,TDP 10W,Compatible with the full range of Intel Jasper Lake cpus, customers can flexibly choose
chipset	SOC
Internal memory	2 * SODIMM slots, supporting a single channel 2933 MHZ DDR4 memory with a maximum of 16GB
display	Integrated Intel®HD Graphics core graphics card supports DirectX12.1,OpenGL4.5, and supports 4K display
	1* DP interface. The maximum resolution is 1920*1200@60Hz
	The 1*HD OUTPUT1.4 port supports a maximum resolution of 4096*2304@24Hz
network	2* Intel ®I226V Gigabit network adapter chip, support network wake up /PXE function
deposit	6* SATA3.0 hard disk interface, transmission speed up to 6Gbps
	1* M.2 slot, supporting the M.2 2280 PCIE X12 standard SSD
Tone frequency	Onboard ALC897 7.1+2 channel hi-fi audio controller with MIC/Line-out support
Expansion slot	1* PCI 3.0 X4 slot (X1 signal, choose one of two with WIFI)
	1* M.2 slot, supporting the M.2 2230 Key E WIFI module
I/O ports on the backplane	1* TF card slot
	4* USB2.0 interface
	1* DP interface
	1* HD OUTPUT interface
	1* RJ45 serial port
	2* RJ45 Gigabit network interface
	1* Line-out/MICK 2-in-1 audio interface
	1* Clear CMOS button

Built-in I/O interface	2* USB3.0 interface 2*10pin
	1 * UART serial port 1 * 4pin
	1* front audio interface 2*5pin
	1* Network indicator port 1*4pin
	1* Front panel function button and indicator port 2*5pin
	1* 4pin ATX power interface
	1* 20pin ATX power interface
Fan interface	1*4pin CPU fan interface; 2*4pin system fan port
GPIO	Supports four in four out GPIO function
BIOS	128Mb Flash ROM
Guard dog	Support hardware reset function (256 level, 0~255 seconds)
Operating system	Windows 10/Windows 11/Linux
Power supply type	Powered by ATX 20Pin and 8pin power supplies
Operating temperature	0℃ to 60℃
Storage temperature	-20℃ to 70℃
Working humidity	5%-95% relative humidity, no condensation
Size	170mm * 170mm

订购信息：

No.	Model	Processor	Frequency	Memory	VGA	HD OUTPUT	DP	LAN	USB	COM	RS485/422	Power
1	N510S6 VER:1.0	N5105	2.0G	2*SODDDR4	/	1	1	2*I226V	6	1	/	ATX
2	N509S6 VER:1.0	N5095A	2.0G	2*SODDDR4	/	1	1	2*I226V	6	1	/	ATX

